

BERGS



Linux
Cladding

Modern & Distinctive. Create a Natural & Timeless Look.

50-YEAR ROT WARRANTY | HIDDEN FIX SYSTEM



Pictures courtesy of Bergs

Linux Cladding - Virtually maintenance free



Features

- | Finished product - virtually maintenance free
- | Available in lengths of 3.0m to 4.8m
- | Will develop naturally to a silver grey tone
- | FSC® certified




What is Linax?


- | Planed Redwood is UC3 high pressure treated.
- | Hot Linseed Oil is added in a vacuum pressure tank which evaporates water from the timber.
- | The linseed oil surrounds the UC3 treatment and this makes the product dimensionally stable.
- | Produced in Sweden from FSC certified forest. FSC® is dedicated to the promotion of responsible forest management worldwide.

Benefits



- | **50-year rot warranty** (product must be registered within 90-days of purchase)
- | **12-year product warranty on dimensional stability**
- | **Hidden fix jointing system**

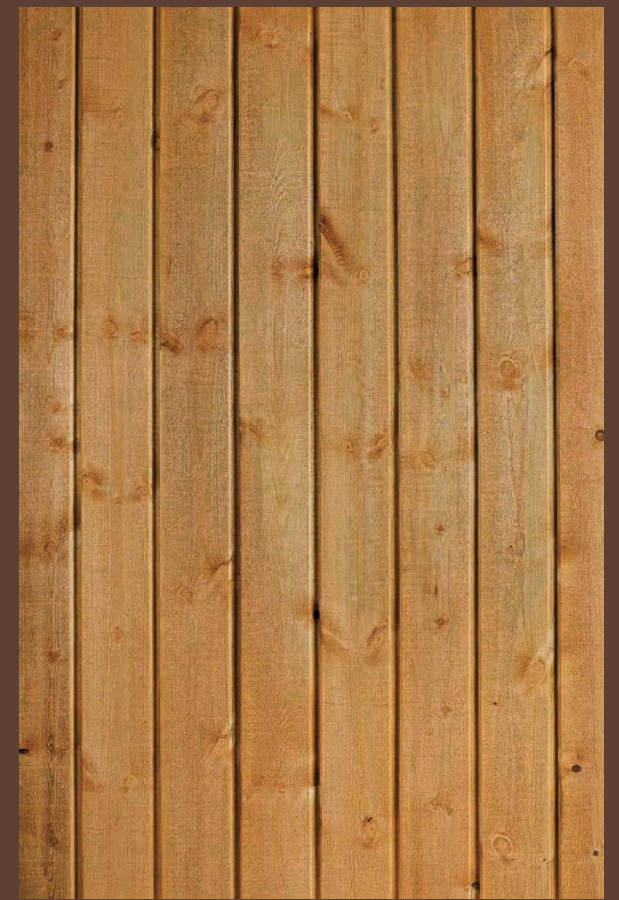


Profile Name	Dimension Act	Dimension Nom	Laid measure
HTL-V	18 x 142 mm	25 x 150 mm	123 mm
HTL-C	19 x 144 mm	25x150 mm	125 mm
Corner Pieces	22 x 95 mm	25x100 mm	n/a

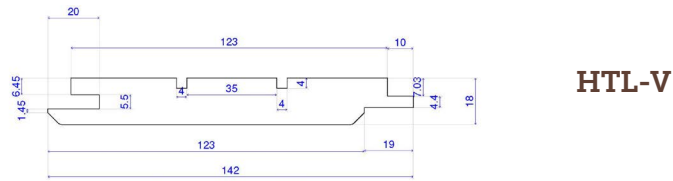

HTL-V

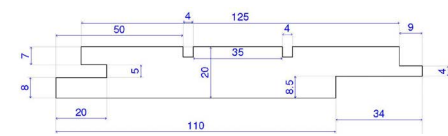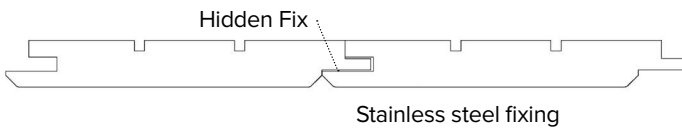


HTL-C

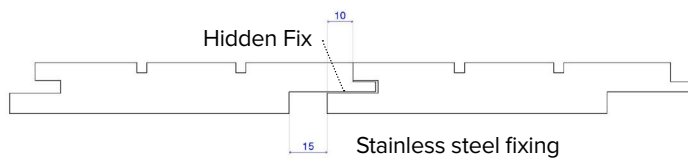

The Linax Production Process

- | Planed Redwood is UC3 high pressure treated
- | It is left to dry for 48 hours before starting the Linax
- | Before the process starts, the timber is rotated 90 degrees. This allows all sides of the timber to be treated
- | Hot linseed oil is added in a vacuum pressure tank which evaporates water from the timber.
- | The linseed oil surrounds the UC3 treatment and makes the product dimensionally stable.

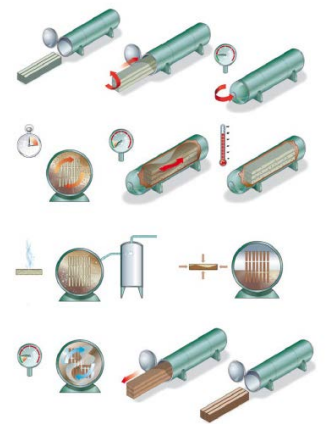

Linax Maintenance

Before maintenance oils are added;

- | The cladding should be dry and clean
- | Any resin pockets that have developed should be scraped away
- | High pressure water cleaners are not recommended and may damage the Linax product and remove layer of treatment and invalidate warranties
- | Household detergents that do not contain bleach may be used.

Linax Oil

- | Available in 5L tins
- | Used for touching up cut sections & maintenance
- | Linax oil glaze is the only product suitable for Linax timber products
- | Will cover 4-6 / Litre on sawn surfaces such as cladding

